


FPI Mag Plus 3000

FPI Mag Plus 5000

Flow Meter Specification Sheet

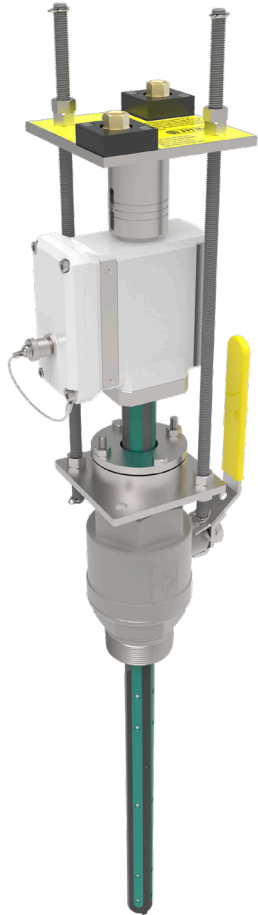

Applications

FPI Mag Plus 3000 and 5000 Series flow meters are intended exclusively for clean water applications. These can include:

- Well Water
- Potable Water
- Pump Stations
- Rate-of-Flow Control
- Raw Water Transmission
- Distribution
- Effluent
- Filter balancing and backwash
- Pumping stations
- UV dosing
- Wells and booster stations

Benefits

- **Hot Tap Installation** - No service interruption
- **Accurate** - Measures the full flow profile
- **Lower Cost** - Installed savings more than 45%
- **Robust** - No moving parts to wear or break
- **Versatile** - Great for plant maintenance, upgrades and retrofits
- **Accessible** - Insertion design provides easy access
- **Virtually No Maintenance** - No field calibration required

Performance Advantages

- Hot tapped for quick, simple installation
- Measures the full profile, not just a single point
- High accuracy, FPI Mag Plus 5000 +/- 0.5%
- FPI Mag Plus 3000 +/- 1%
- Bi-directional flow indication and measurement
- Maintenance free
- Wide flow range
- Available from 4" - 138"

Features

No Service Interruption for Installation

The FPI Mag Plus® (Full Profile Insertion) electromagnetic flow meter is the only rugged steel shaft, hot tap full profile insertion flow meter available on the market. The FPI Mag Plus installs without service interruption making it ideal for retrofits, upgrades and maintenance projects and sites not previously metered. The hot tap installation significantly reduces installation time; eliminating the need to de-water lines or cut pipe.

Accurate Measurement

The multi-electrode sensor delivers an accurate measurement of the full pipe profile rivaling the performance of a full-bore mag meter. The repeatable, stable measurement across the entire flow profile compensates for variable flow profiles, including swirl and turbulent conditions.

An Economical Metering Solution

The FPI Mag Plus is the industry's most economical flow metering solution offering unbeatable value in the cost of installation and ownership reducing installed costs by more than 45 percent in medium and large line sizes. The compact insertion design fits in confined spaces and offers complete accessibility. The flow meter can be removed in pipes under pressure for easy inspection, cleaning, calibration, or verification. Installation costs are reduced by eliminating the need for heavy equipment and extensive manpower.

Durability and Longevity

The innovative flow meter comes pre-calibrated from McCrometer's NIST traceable calibration labs and requires no recalibration in the field. With no moving parts and a single-piece design, the FPI Mag Plus's sensor contains nothing to wear or break and is generally immune to clogging by sand, grit, or other debris. The electrodes are encased in a heavy-duty 316 stainless steel sensor body for maximum structural integrity and coated with a NSF certified 3M™ fusion-bonded epoxy coating for operational longevity.

Signal Conversion and Transmission

The signal converter is where the raw flow data is converted into calibrated, usable output parameters for display and transmission through the transmitter. This allows the measurements, functional programming, and data logs to be communicated through the display visually and through external connections to transmit both wired and wirelessly to external devices and networks. There are two different models used in various applications; both are available as either meter or remote mount.

ProComm Go Transmitter

The FPI Mag Plus 3000 flow meter is accompanied by the ProComm GO electronics and can be battery powered, ideal for remote installations and locations with unreliable power sources.

- Output options include pulse, 4-20mA, Modbus, and telemetry
- Battery powered with optional solar, AC or DC power with battery backup
- Offering $\pm 1\%$ accuracy
- DIY battery replacement and in-field programming available via USB cable and laptop
- UL, CSA certifications

ProComm Max Transmitter

The FPI Mag Plus 5000 is offered with the ProComm Max electronics, offering greater accuracy and more sophisticated output options for users needing superior system integration and data collection.

- Output options include Digital Pulse, 4-20mA, Hart, Modbus, and Ethernet IP
- Datalogger and optional AMI/AMR
- Optional Class 1 Div 2
- AC/DC powered
- $\pm 0.5\%$ standard accuracy, $\pm 0.2\%$ optional
- Bi-directional flow standard
- Rated to 140F for high temperatures
- CE, UL, CSA certification

Installation

- **Hot Tap Installation** - No service interruption
- **Pipe Run Requirements** - Pipe run requirements for the FPI Mag Plus sensor can vary, depending on the disturbances in the pipe run. See FPI Mag Plus flow meter manual 30126-03 or 30126-04, step 3 of the installation procedure for a table of upstream and downstream straight-pipe run recommendations.

FPI Mag Plus Flow Meter Specifications

All specifications apply to both FPI Mag Plus 3000 and FPI Mag Plus 5000 models except where noted.

The full pipe averaging flow meter comes complete with Mounting Hardware, AC Converter with Dual 4-20mA output, 25 Feet of Dual Submersible Cables with quick connects at sensor, Stainless Steel Body, 316 Stainless Steel Electrodes, NSF Approved Fusion Bonded Epoxy Coating, 2" Stainless Steel Ball Valve (minimum of 1-7/8" port I.D.), 2" x Close Stainless Steel Nipple, 2-Year Warranty.

Physical Specifications

Measurement	Electromagnetic
Directionality	Forward and reverse
Pipe Sizes	Up to 138"
Body Style	Full profile insertion
Materials	<ul style="list-style-type: none"> Stainless steel body 316 stainless steel electrodes NSF approved fusion bonded epoxy coating 2" stainless steel ball valve (minimum of 1-7/8" port I.D.) 2" x close stainless steel nipple
Coating	Fusion bonded epoxy (NSF 61 approved) coated 316 stainless steel
Electrodes	316 Stainless Steel, Hastelloy optional
Electrical Connections	Quick Connect
Electronics	<ul style="list-style-type: none"> FPI Mag Plus 3000: ProComm GO electronics FPI Mag Plus 5000: ProComm Max transmitter
Electronics Mount	Remote mount only
Sensor Cable Lengths	<ul style="list-style-type: none"> Standard: 25'/7.6 m McCrometer supplied submersible cable with each remote mount unit. Optional: Up to 500'/152.4 m, or 25'/7.6 m max for battery powered. Quick connect: Available in standard cable lengths: Feet: 25, 50, 75, 100, 125, 150, 175, 200, 500 Meters: 7.6, 15.25, 22.5, 30.5, 38.1, 45.75, 53.3, 61, 152.4 Custom quick connect cable lengths at additional cost.
Insertion Hardware	316 Stainless Steel
Compression Seal	Silicone Rubber

Performance and Operational Specifications

Measurement Method	Volumetric flow in filled flow conduits 4" (100 mm) to 138" (3,500 mm) utilizing insertable electromagnetic averaging sensor. Flow indication in English Standard or Metric units.
Direction Measurement	<ul style="list-style-type: none"> 395 sensor: Forward flow measurement and reverse flow indication 394 sensor: Bidirectional flow measurement
Operating Temperature	-10 to 93°C (14 to 200°F) up to 250 PSI
Storage Temperature	<p>-15 to 60°C (5 to 140° F)</p> <p>Note regarding storage: During freezing conditions and when meter is not in use, sensor must be removed from pipe and stored in dry conditions.</p> <p>Note: Damage to the sensor caused by allowing the sensor freeze in the pipe is not covered by the warranty.</p>
IP Rating	<ul style="list-style-type: none"> Standard model: Quick Connect (IP68) HL model: Quick Connect (IP67)

FPI Mag Plus Flow Meter Specifications (cont.)

Sensor Submersibility Depth	With standard quick connect: 9 m (30 ft.)
Velocity Range	See following pages flow velocity ranges by line size for each type of electronics.
Calibrated accuracy for forward and bidirectional sensors	<ul style="list-style-type: none"> ProComm Max Electronics: $\pm 0.5\%$ of measured value ± 0.006 ft/s (± 0.0018 m/s) ProComm Go Electronics : $\pm 1\%$ of measured value ± 0.006 ft/s (± 0.0018 m/s) Reverse Flow: $\pm 1\%$ of measured value ± 0.006 ft/s (± 0.0018 m/s)
Linearity	0.3% of Range
Repeatability	0.2% of Reading
Pipe Run Requirements	Pipe run requirements for the FPI Mag Plus sensor can vary, depending on the disturbances in the pipe run. See FPI Mag Plus flow meter manual 30126-03 or 30126-04, step 3 of the installation procedure for a table of upstream and downstream straight-pipe run recommendations.

Other Specifications

Certifications and Approvals	<p>FPI Mag Plus 3000</p> <p>Standard model:</p> <ul style="list-style-type: none"> ISO 9001:2015 certified quality management system Certified by MET to UL 61010-1 Certified to NSF / ANSI Standards* <p>HL Model:</p> <ul style="list-style-type: none"> ISO 9001:2015 certified quality management system Certified by MET to UL 61010-1 and MET C22.2 No. 61010-1-04 <ul style="list-style-type: none"> Class I, Division 2, Groups A-D, T4 Class I, Zone 2, IIC T4 Certified to NSF / ANSI Standards*
System Options	<p>FPI Mag Plus 5000</p> <ul style="list-style-type: none"> ISO 9001:2015 certified quality management system Certified to NSF / ANSI Standards* Hastelloy electrodes Annual verification / calibration Stainless steel ID tag
Meter Options and Accessories	<ul style="list-style-type: none"> Sensor insertion tool Extension to hardware clearance Additional sensor cable up to 475' (500' max for model 395 and 200' max for model 394)
Warranty	2 years

* Certified by IAPMO R&T to NSF/ANSI 61 for material safety and NSF/ANSI 372 for low lead content.

Note regarding cable length: McCrometer recommends minimizing cable length. Electromagnetic flow meters may have unfavorable signal strength to noise ratio in electrically noisy environments. Longer lengths of cable increase the likelihood of interference. In those cases where the meter's signal must be transmitted a long distance, or where the environment may be particularly noisy, we suggest using the converter's analog output(s) that allows locating the transmitter as close as possible to the metering location.

Flow Meter Pipe Sizes and Flow Ranges with ProComm Go Electronics

Imperial Units

Pipe Size (Nominal)	Pipe ID Range		Flow Ranges (GPM Standard)		Standard Program Defaults ¹	Minimum Clearance Required During Installation ²	Velocity Range ³ (f/s)
	Min Pipe ID	Max Pipe ID	Min (GPM) ¹	Max (GPM) ¹	20mA (GPM)		
S = Standard (Available in 395 models Pipe Sizes 4" - 24" as shown in table below) C = Custom (Available in all 394 and 395 models Pipe Sizes 4" - 138") Standard Length Hardware and Installation Clearance Dimensions are based on a 4" Maximum Height Coupling and Pipe Schedule Standard							
4"	3.74	4.99	20	1280	1280	51"	0.5 - 32
6"	5.00	7.24	43	2800	2800	51"	0.5 - 32
8"	7.25	9.24	78	5000	5000	55"	0.5 - 32
10"	9.25	11.24	130	8000	8000	55"	0.5 - 32
12"	11.25	12.99	180	11000	11000	59"	0.5 - 32
14"	13.00	14.99	250	15000	15000	59"	0.5 - 32
16"	15.00	16.75	320	20000	20000	59"	0.5 - 32
18"	16.76	18.80	400	26000	26000	63"	0.5 - 32
20"	18.81	22.74	500	28000	28000	63"	0.5 - 28
24"	22.75	24.99	680	33000	33000	67"	0.5 - 23
30"	25.00	33.99	1000	44000	44000	71.25"	0.5 - 20
36"	34.00	39.99	1700	48000	48000	77.25"	0.5 - 15
42"	40.00	45.99	2200	56000	56000	83.25"	0.5 - 13
48"	46.00	51.99	2800	62000	62000	89.25"	0.5 - 11
54"	52.00	57.99	3700	79000	79000	95.25"	0.5 - 11
60"	58.00	63.99	4300	97000	97000	101.25"	0.5 - 11
66"	64.00	69.99	5300	106000	106000	107.25"	0.5 - 10
72"	70.00	75.99	6300	127000	127000	113.25"	0.5 - 10
78"-128"	76.00	138.00	Available - Call Factory at 1-800-220-2279				

¹ Default totalizer units measured as KGAL.

² Hardware clearance after installation for all sizes is 28".

³ Flow temperature range -10° to 60° C (14° to 140° F) up to 250 PSI, max pressure is 250 psi.

! Required Information

At the time of ordering, please be prepared to provide the following information:

1. Pipe ID and Pipe OD
2. Unit of Measure (US Gallons is Default)
3. Maximum pressure
4. FPI Specification Data Sheet for custom length sensors

Consult factory if any chemicals are in use.

Flow Meter Pipe Sizes and Flow Ranges with ProComm Go Electronics

Metric Units

Pipe Size (Nominal) (mm)	Pipe ID Range		Flow Ranges (m ³ /h standard)		Standard Program Defaults ¹	Minimum Clearance Required During Installation (cm) ²	Velocity Range ³ (m/s)
	Min Pipe ID (mm)	Max Pipe ID (mm)	Min (m ³ /h) ¹	Max (m ³ /h) ¹	20mA		
S = Standard (Available in 395 models pipe sizes 100 mm - 600 mm as shown in table below) C = Custom (Available in all 394 and 395 models pipe sizes 100 mm - 3,500 mm) Standard length hardware and installation clearance dimensions are based on a 100 mm maximum height coupling and pipe schedule standard							
DN100	95	127	5	290	135	129.5	0.15 - 10
DN150	127	184	10	635	295	129.5	0.15 - 10
DN200	184	235	18	1135	535	139.7	0.15 - 10
DN250	235	285	30	1815	900	139.7	0.15 - 10
DN300	286	330	41	2500	1250	149.9	0.15 - 10
DN350	330	381	57	3400	1700	149.9	0.15 - 10
DN400	381	425	73	4550	2150	149.9	0.15 - 10
DN450	426	478	91	5900	2700	160.0	0.15 - 10
DN500	478	578	114	6350	3400	160.0	0.15 - 8.5
DN600	578	635	154	7500	4650	170.2	0.15 - 7
DN750	635	863	227	10000	6800	181.0	0.15 - 6
DN900	864	1016	386	10900	8200	196.2	0.15 - 4.5
DN1050	1016	1168	500	12700	10200	211.5	0.15 - 4
DN1200	1168	1321	636	14000	12500	226.7	0.15 - 3.5
DN1350	1321	1473	840	18000	14750	241.9	0.15 - 3.5
DN1500	1473	1625	977	22000	18000	257.2	0.15 - 3.5
DN1650	1626	1778	1204	24000	20500	272.4	0.15 - 3
DN1800	1778	1930	1431	29000	22500	287.7	0.15 - 3
DN2000 and up	1931	3505	Available - Call Factory at 1-800-220-2279				

¹ Default totalizer units measured as m³.

² Hardware clearance after installation for all sizes is 700 mm.

³ Flow temperature range -10° to 60° C (14° to 140° F) up to 17 bar, max pressure is 17 bar.

Required Information

At the time of ordering, please be prepared to provide the following information:

1. Pipe ID and pipe OD
2. Unit of measure (m³ is default)
3. Maximum pressure
4. FPI specification data sheet for custom length sensors

Consult factory if any chemicals are in use.

Flow Meter Pipe Sizes and Flow Ranges with ProComm Max Transmitter

Imperial Units

Pipe Size (Nominal)	Pipe ID Range		Flow Ranges (GPM Standard)		Standard Program Defaults ¹	Minimum Clearance Required During Installation ²	Velocity Range ³ (f/s)
	Min Pipe ID	Max Pipe ID	Min (GPM) ¹	Max (GPM) ¹	20mA (GPM)		
S = Standard (Available in 395 models Pipe Sizes 4" - 24" as shown in table below) C = Custom (Available in all 394 and 395 models Pipe Sizes 4" - 138") Standard Length Hardware and Installation Clearance Dimensions are based on a 4" Maximum Height Coupling and Pipe Schedule Standard							
4"	3.74	4.99	12	1280	1280	51"	0.3 - 32
6"	5.00	7.24	26	2800	2800	51"	0.3 - 32
8"	7.25	9.24	47	5000	5000	55"	0.3 - 32
10"	9.25	11.24	80	8000	8000	55"	0.3 - 32
12"	11.25	12.99	110	11000	11000	59"	0.3 - 32
14"	13.00	14.99	150	15000	15000	59"	0.3 - 32
16"	15.00	16.75	190	20000	20000	59"	0.3 - 32
18"	16.76	18.80	240	26000	26000	63"	0.3 - 32
20"	18.81	22.74	300	28000	28000	63"	0.3 - 28
24"	22.75	24.99	410	33000	33000	67"	0.3 - 23
30"	25.00	33.99	600	44000	44000	71.25"	0.3 - 20
36"	34.00	39.99	1000	48000	48000	77.25"	0.3 - 15
42"	40.00	45.99	1300	56000	56000	83.25"	0.3 - 13
48"	46.00	51.99	1700	62000	62000	89.25"	0.3 - 11
54"	52.00	57.99	2200	79000	79000	95.25"	0.3 - 11
60"	58.00	63.99	2600	97000	97000	101.25"	0.3 - 11
66"	64.00	69.99	3200	106000	106000	107.25"	0.3 - 10
72"	70.00	75.99	3800	127000	127000	113.25"	0.3 - 10
78"-128"	76.00	138.00	Available - Call Factory at 1-800-220-2279				

¹ Default totalizer units measured as KGAL.

² Hardware clearance after installation for all sizes is 28".

³ Flow temperature range -10° to 60° C (14° to 140° F) up to 250 PSI, max pressure is 250 psi.

Required Information

At the time of ordering, please be prepared to provide the following information:

1. Pipe ID and Pipe OD
2. Unit of Measure (US Gallons is Default)
3. Maximum pressure
4. FPI Specification Data Sheet for custom length sensors

Consult factory if any chemicals are in use.

Flow Meter Pipe Sizes and Flow Ranges with ProComm Max Transmitter

Metric Units

Pipe Size (Nominal) (mm)	Pipe ID Range		Flow Ranges (m ³ /h standard)		Standard Program Defaults ¹	Minimum Clearance Required During Installation (cm) ²	Velocity Range ³ (m/s)
	Min Pipe ID (mm)	Max Pipe ID (mm)	Min (m ³ /h) ¹	Max (m ³ /h) ¹	20mA		
S = Standard (Available in 395 models pipe sizes 100 mm - 600 mm as shown in table below) C = Custom (Available in all 394 and 395 models pipe sizes 100 mm - 3,500 mm) Standard length hardware and installation clearance dimensions are based on a 100 mm maximum height coupling and pipe schedule standard							
DN100	95	127	3	290	135	129.5	0.1 - 10
DN150	127	184	6	635	295	129.5	0.1 - 10
DN200	184	235	11	1135	535	139.7	0.1 - 10
DN250	235	285	18	1815	900	139.7	0.1 - 10
DN300	286	330	25	2500	1250	149.9	0.1 - 10
DN350	330	381	35	3400	1700	149.9	0.1 - 10
DN400	381	425	45	4550	2150	149.9	0.1 - 10
DN450	426	478	55	5900	2700	160.0	0.1 - 10
DN500	478	578	70	6350	3400	160.0	0.1 - 8.5
DN600	578	635	95	7500	4650	170.2	0.1 - 7
DN750	635	863	135	10000	6800	181.0	0.1 - 6
DN900	864	1016	230	10900	8200	196.2	0.1 - 4.5
DN1050	1016	1168	295	12700	10200	211.5	0.1 - 4
DN1200	1168	1321	385	14000	12500	226.7	0.1 - 3.5
DN1350	1321	1473	500	18000	14750	241.9	0.1 - 3.5
DN1500	1473	1625	590	22000	18000	257.2	0.1 - 3.5
DN1650	1626	1778	725	24000	20500	272.4	0.1 - 3
DN1800	1778	1930	865	29000	22500	287.7	0.1 - 3
DN2000 and up	1931	3505	Available - Call Factory at 1-800-220-2279				

¹ Default totalizer units measured as m³.

² Hardware clearance after installation for all sizes is 700 mm.

³ Flow temperature range -10° to 60° C (14° to 140° F) up to 17 bar, max pressure is 17 bar.

Required Information

At the time of ordering, please be prepared to provide the following information:

1. Pipe ID and pipe OD
2. Unit of measure (m³ is default)
3. Maximum pressure
4. FPI specification data sheet for custom length sensors

Consult factory if any chemicals are in use.

FPI Mag Plus 5000 Part Number Matrix

FI539		-																
Single or Bidirectional Flow																		
	Bidirectional Flow	4																
	Single Forward Flow	5																
Standard or Customer Length Sensor																		
	Standard Length Sensor	S																
	Custom Length Sensor	C																
Nominal Line Size																		
4 in	04																	
6 in	06																	
8 in	08																	
10 in	10																	
12 in	12																	
14 in	14																	
16 in	16																	
18 in	18																	
20 in	20																	
24 in	24																	
30 in	30																	
36 in	36																	
42 in	42																	
48 in	48																	
54 in	54																	
60 in	60																	
66 in	66																	
72 in	72																	
78 in	78																	
84 in	84																	
90 in	90																	
96 in	96																	
100 in	H0																	
110 in	H1																	
120 in	H2																	
130 in	H3																	
Sensor Length Options																		
	20" Sensor Length	020																
	21" Sensor Length	021																
	Each nominal Inch Length	XXX																
	175" Sensor Length	175																
Electrode Material Options																		
	S316 Stainless Steel (Standard)	S																
	Hastelloy	H																

FPI Mag Plus 5000 Part Number Matrix (cont.)

FI539	-																		
Ball Valve Options																			
2" NPT		N																	
2" BSPT		B																	
No Valve 2" NPT		X																	
No Valve 2" BSPT		Y																	
Cable Connector Options																			
Quick Connect		Q																	
Remote Cable Length Options																			
25 feet (Standard)		025																	
50 feet		050																	
75 feet		075																	
100 feet		100																	
125 feet		125																	
150 feet		150																	
175 feet		175																	
200 feet		200																	
500 feet		500																	
Transmitter Power Options																			
A/C Power		A																	
DC Power		D																	
Transmitter Analog/Hart Output Options																			
Single 4-20mA Analog, Dual Digital (Standard)		1																	
Dual 4-20mA Analog, Dual Digital		2																	
1 Hart 4-20mA Analog, 1 Standard 4-20mA Analog, Dual Digital		3																	
Transmitter Output Protocol Options																			
No Digital Protocol Outputs																			
Modbus Protocol		MOD																	
Ethernet IP Protocol (TCP/IP Card only)		EIP																	
Output Protocol Types																			
No Digital outputs																			
RTU (RS485) Output (Modbus)		R																	
TCP/IP Output (Modbus, Ethernet IP)		E																	
Smart Output Protocol / SmartTrax Options																			
No AMI Outputs/SmartTrax Options																			
Sensus Protocol (6ft cable, Nicor Connector hardwired only)		SEN																	
Itron 6 digit Protocol (6ft cable, Nicor Connector hardwired only)		IT6																	
Itron 9 digit [100W] Protocol (6ft cable, Nicor Connector hardwired only)		IT9																	
Neptune Protocol (6ft cable, Nicor Connector hardwired only)		NEP																	
6 ft SmartTrax Standalone Unit ExactRead Cable (Strain Relief Only)		S06																	
25 ft SmartTrax Standalone Unit ExactRead Cable (Strain Relief Only)		S25																	
50 ft SmartTrax Standalone Unit ExactRead Cable (Strain Relief Only)		S50																	
Hazardous Area Location																			
No Hazardous Location Needed																			
Class 1, Division 2, Groups A-D, T5		HL																	

ProComm Go Transmitter Specifications

Physical Specifications

Electronic Housing	Diecast aluminum, powder coated enclosure w/ tamper resistant seal, 6½" x 6½" x 43/8" tall
Transmitter Dimensions	See "Dimensions" section for meter mount and remote mount transmitter dimensions.
Power	Battery: Standard: three 3.6V lithium-thionyl chloride (Li-SOCl ₂) D size batteries with two AA backup batteries AC Power: 100-240VAC/45-66Hz (4W) DC Power: Linear power supply 10-35VDC (4 W)
Electrical Connections	<ul style="list-style-type: none"> Optional shielded cable for 10-32VDC/4-20 mA output Optional shielded cable for pulse out

Performance and Operational Specifications

Battery Life	Five-year expected battery life, five-year battery warranty
Location	Indoor or outdoor use
Altitude	Operating: 2000 meters Storage: 12,000 meters
Operating Temperature	-4° to 140° F (-20° to 60° C)
Storage Temperature	-4° to 140° F (-20° to 60° C)
Relative Humidity	0% to 100%
IP Rating	IP67 Die cast aluminum transmitter
Outputs	Digital output: Digital pulse (open collector) output for volumetric - Two isolated digital pulse (open collector) outputs for volumetric - AMI output Analog output: 4-20mA: Galvanically Isolated, 16 Bit resolution. All power configurations (including battery). Note: 9-30 VDC loop power required (not supplied via transmitter)

Display and Measurement

Display	<ul style="list-style-type: none"> 2-Line LCD display (no backlight) Non-volatile memory Anti-reverse totalizer (standard) Total (to 9 digits of precision) 	<ul style="list-style-type: none"> Flow rate and velocity (to 5 digits of precision) Two alarms: low battery and empty pipe (optional) Opening lid activates display 																																																
Digits	5 Rate, 9 Total																																																	
Units	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 25%;">GPM</td> <td style="width: 25%;">Gallons per minute</td> <td style="width: 25%;">IGM</td> <td style="width: 25%;">Imperial gal per minute</td> <td style="width: 25%;">CFM</td> <td style="width: 25%;">Cubic feet per minute</td> </tr> <tr> <td>MGD</td> <td>Mega gal per day</td> <td>MI9</td> <td>Miners inch (9G)</td> <td>B5M</td> <td>Barrels per minute (55G)</td> </tr> <tr> <td>CFS</td> <td>Cubic feet per second</td> <td>MI1</td> <td>Miners inch (11.22G)</td> <td>B5H</td> <td>Barrels per hour (55G)</td> </tr> <tr> <td>MLD</td> <td>Megaliters per day</td> <td>APD</td> <td>Acre feet per day</td> <td>B5D</td> <td>Barrels per day (55G)</td> </tr> <tr> <td>LPS</td> <td>Liters per second</td> <td>KLH</td> <td>Kiloliters per hour</td> <td>B4M</td> <td>Barrels per minute (42G)</td> </tr> <tr> <td>CMH</td> <td>Cubic meters per hour</td> <td>LPH</td> <td>Liters per hour</td> <td>B4H</td> <td>Barrels per hour (42G)</td> </tr> <tr> <td>LPM</td> <td>Liters per minute</td> <td>CMM</td> <td>Cubic meters per minute</td> <td>B4D</td> <td>Barrels per day (42G)</td> </tr> <tr> <td>GPH</td> <td>Gallons per hour</td> <td>CFM</td> <td>Cubic feet per minute</td> <td></td> <td></td> </tr> </table>		GPM	Gallons per minute	IGM	Imperial gal per minute	CFM	Cubic feet per minute	MGD	Mega gal per day	MI9	Miners inch (9G)	B5M	Barrels per minute (55G)	CFS	Cubic feet per second	MI1	Miners inch (11.22G)	B5H	Barrels per hour (55G)	MLD	Megaliters per day	APD	Acre feet per day	B5D	Barrels per day (55G)	LPS	Liters per second	KLH	Kiloliters per hour	B4M	Barrels per minute (42G)	CMH	Cubic meters per hour	LPH	Liters per hour	B4H	Barrels per hour (42G)	LPM	Liters per minute	CMM	Cubic meters per minute	B4D	Barrels per day (42G)	GPH	Gallons per hour	CFM	Cubic feet per minute		
GPM	Gallons per minute	IGM	Imperial gal per minute	CFM	Cubic feet per minute																																													
MGD	Mega gal per day	MI9	Miners inch (9G)	B5M	Barrels per minute (55G)																																													
CFS	Cubic feet per second	MI1	Miners inch (11.22G)	B5H	Barrels per hour (55G)																																													
MLD	Megaliters per day	APD	Acre feet per day	B5D	Barrels per day (55G)																																													
LPS	Liters per second	KLH	Kiloliters per hour	B4M	Barrels per minute (42G)																																													
CMH	Cubic meters per hour	LPH	Liters per hour	B4H	Barrels per hour (42G)																																													
LPM	Liters per minute	CMM	Cubic meters per minute	B4D	Barrels per day (42G)																																													
GPH	Gallons per hour	CFM	Cubic feet per minute																																															

ProComm Go Transmitter Specifications (cont.)




Display and Measurement (cont.)

Totalizer Units	GAL	Gallons	B42	Barrel (42G)	MH1	Miners Inch Hour (11.22G)
	CUF	Cubic Feet	B46	Barrel (46G)	MD1	Miners Inch Day (11.22G)
	AFT	Acre Feet	B55	Barrel (55G)	MH9	Miners Inch Hour (9G)
	CUM	Cubic Meters	IMG	Imperial Gallon	MD9	Miners Inch Day (9G)
	LIT	Liters	AIN	Acre Inch	KGL	Kilo Gallons
	MML	Megaliter	TON	Ton (Short)	MGL	Mega Gallons
	MTT	Metric Ton (KL)	MM1	Miners Inch Minute (11.22G)	IN3	Cubic Inch
	B31	Barrel (31G)	MM9	Miners Inch Minute (9G)		
Data Logger	Standard with all models, minimum of five years of data stored					

Other Specifications

Options and Accessories	<ul style="list-style-type: none"> Data Logger - included as standard with five years of data storage at default (12hr) interval. (Cable sold separately) AC, DC, and battery powered with battery backup powered available
Safety	<ul style="list-style-type: none"> IEC 61010-1, Pollution Degree II Overvoltage protection Category III

Certifications

Standard Model	<ul style="list-style-type: none"> ISO 9001:2015 certified quality management system CE Certified by MET to UL 61010-1 	  
HL Model	<ul style="list-style-type: none"> ISO 9001:2015 certified quality management system CE Certified by MET to UL 61010-1 and MET C22.2 No. 61010-1-04 <ul style="list-style-type: none"> Class I, Division 2, Groups A B C D, T4 Class I, Zone 2, IIC T4 <p><i>Note: ProComm GO with SmartTrax On Board is not available for hazardous locations.</i></p>	



Representantes / Distribuidores Exclusivos

 Argentina

Tel: (+54 11) 5352 2500

Email: info@dastecsrl.com.ar

Web: www.dastecsrl.com.ar

 Uruguay www.dastecsrl.com.uy

 Paraguay www.dastecsrl.com.py

 Bolivia www.tecdas.com.bo

ProComm Max Transmitter Specifications

Physical Specifications

Electronic Housing	Diecast aluminum, powder coated enclosure w/ tamper resistant seal
Transmitter Dimensions	Remote Mount: Height: 7.3" (18.5 cm) Width: 8.5" (21.6 cm) Depth: 4.3" (10.9 cm)
	Meter Mount: Height: 6.9" (17.5 cm) Width: 7.2" (18.25 cm) Depth: 6.2" (15.7 cm)
Power	AC Power: 100-240 VAC / 47-66 Hz (10 W) DC Power: 10-35 VDC (10 W) Note: AC or DC must be specified at time of ordering.
Connection Options	Conduit option: 1/2" NPT threaded connections
Galvanic Isolation	All outputs are galvanically isolated from power supply up to 500 V
Conductivity	Minimum conductivity of 5µS/cm

Performance and Operational Specifications

Location	Indoor or outdoor use
Operating and Storage Temperature	-4° to 140° F (-20° to 60° C)
IP Rating	IP67 Die cast aluminum transmitter
Standard Outputs	Single 4-20mA (standard). Galvanically isolated and fully programmable for zero and full scale. A second 4-20mA is available. Two separate digital programmable outputs: open collector transistor usable for pulse, frequency, or alarm settings.
	<ul style="list-style-type: none"> • Volumetric Pulse • Range Indication • Maximum switching voltage: 35 VDC • Maximum switching current: 100mA • Insulation from other secondary circuits: 500V
Optional Outputs	<ul style="list-style-type: none"> • Modbus • HART • Ethernet IP • Datalogger • Smart Output™ (Sensus, Itron 6, Itron 9)

Display and Measurement

Keyboard and Display	Can be used to access and change set-up parameters using six membrane keys and an LCD display					
Units	GAL	Gallons	B42	Barrel (42G)	MH1	Miners Inch Hour (11.22G)
	CUF	Cubic Feet	B46	Barrel (46G)	MD1	Miners Inch Day (11.22G)
	AFT	Acre Feet	B55	Barrel (55G)	MH9	Miners Inch Hour (9G)
	CUM	Cubic Meters	IMG	Imperial Gallon	MD9	Miners Inch Day (9G)
	LIT	Liters	AIN	Acre Inch	KGL	Kilo Gallons
	MML	Megaliter	TON	Ton (Short)	MGL	Mega Gallons
	MTT	Metric Ton (KL)	MM1	Miners Inch Minute (11.22G)	IN3	Cubic Inch
	B31	Barrel (31G)	MM9	Miners Inch Minute (9G)		

Other Specifications

<ul style="list-style-type: none"> • ISO 9001:2015 certified quality management system • CE 	
---	--

Copyright © 2024 McCrometer, Inc. All printed material should not be changed or altered without permission of McCrometer. Any published pricing, technical data, and instructions are subject to change without notice. Contact your McCrometer representative for current pricing, technical data, and instructions.