

# Model SADPmini

## Hand Held Dewpoint Meter

Ranges available between -110°C to +20°C (-166°F to +68°F) dewpoint

The **Model SADPmini** Automatic Dewpoint Hygrometer is a popular global choice for measuring the Dewpoint (moisture content) in dry industrial process gases and dry compressed air. It is perfect for mobile analysis and short term continuous monitoring.


**Ultra Compact - Ultra Portable - Ultra Functional -  
Easy to Use - The Popular Global Choice.**



Measuring instrument  
conforms with  
BS EN 61326-1

**With Desiccant  
Dry Down  
Technology**

### Features

- Various ranges between -110°C to +20°C dewpoint
- Automatic calibration (AutoCal)
- Rechargeable battery - Over 270 hours of continuous operation on full charge
- User selectable units - °C, °F, ppm, ppm(w), ppb, g/m<sup>3</sup>, lbs/MMSCF
- "Desiccant Dry Down Assembly" for quick measurements
- RS485 serial communication and 4-20mA analogue output
- Real time graphic logging to PC
- Advanced DATA logging & PC download
- Pressure correction computation
- True hand held portable device – weighing less than 1.1 kgs
- Robust ergonomically designed custom housing
- Fully self-contained and user friendly
- Capture and display of up to 16,000 data points, with 20 user-definable TAG references
-  also available

### Applications


- Industrial process gases
- Medical air and gases
- Compressed air
- Breathing air
- Laboratory and research
- Gas cylinder testing
- Temporary continuous measurements
- For non-I.S. applications

## Desiccant Dry Down Technology

### The Desiccant Head Assembly

Keeping the sensor dry between tests ensures that the SADPmini is always ready to carry out rapid spot checks. The unique design of the Desiccant Head achieves this by surrounding the sensor with desiccant before the head is raised for sampling.



At no time is the sensor allowed to come into contact with ambient air. The chamber is also designed so that the void space and chamber wall surfaces are purged with sample gas, before exposure of the sensor, so giving faster, more accurate and reliable results.

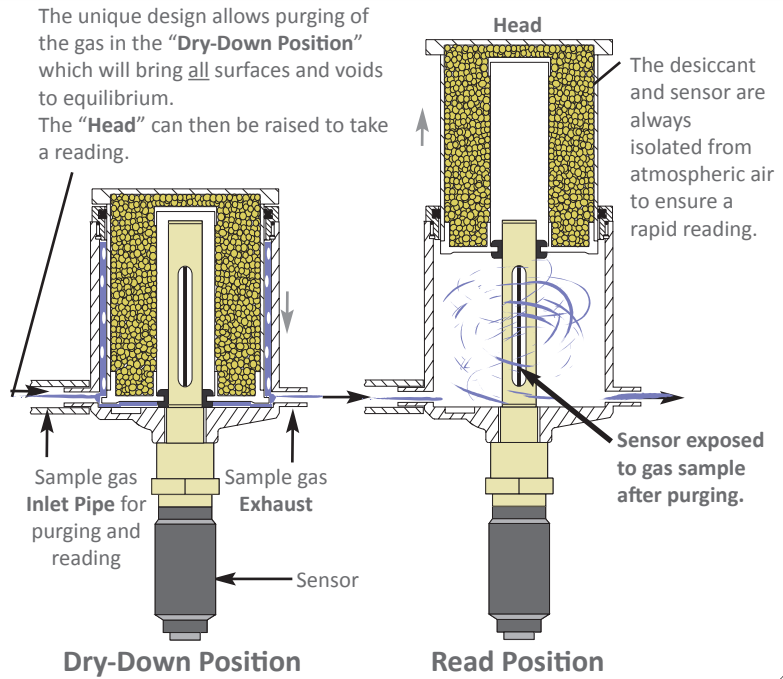

Designed for the measurement of trace moisture in gases and dry compressed air, the **SADPmini** can be used in a wide range of industries including: power utilities, air treatment plants, processing of chemical and pharmaceutical products, general engineering, electronics, plastics, metal manufacture, research and laboratory projects and many more.

This robust, ergonomically designed housing incorporates the moisture sensor, signal conditioning circuitry, memory management, 128 x 64 dot graphics display, 5 key membrane keyboard plus on-board rechargeable lithium-ion battery. This self contained digital unit is user friendly and eliminates the problems experienced by operators and technicians with the bulky size, weight and even analogue readouts associated with the previous generation of traditional dewpoint meters.

## Dimensions

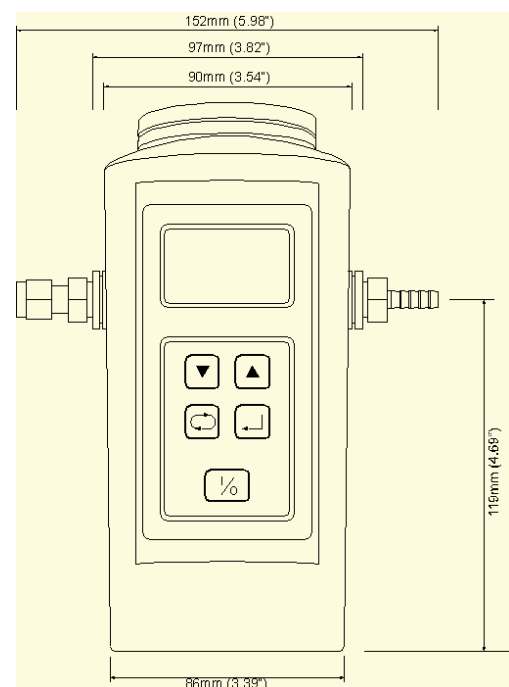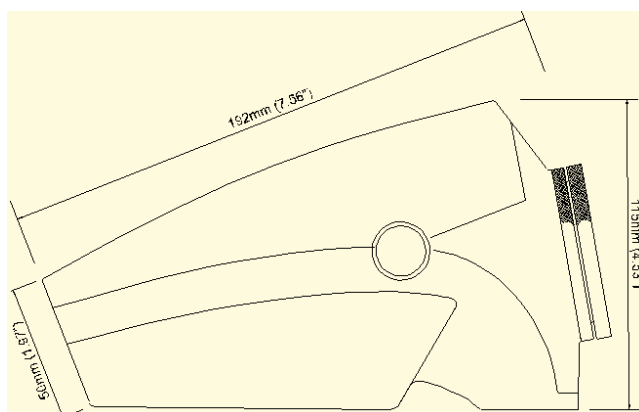

## Specifications

### TYPE B

**SENSING ELEMENT:** Ultra High-Capacitance Aluminium Oxide Type

**RANGE IN DEW POINT:**

<b>SR:</b> -110°C to -20°C (-166°F to -4°F)	dewpoint
<b>PL:</b> -100°C to 0°C (-148°F to +32°F)	dewpoint
<b>RD:</b> -80°C to -20°C (-112°F to -4°F)	dewpoint
<b>GY:</b> -80°C to 0°C (-112°F to +32°F)	dewpoint
<b>BL:</b> -80°C to +20°C (-112°F to +68°F)	dewpoint

**DISPLAY UNITS:**

°C - Degrees Centigrade dew / frost Point  
 °F - Degrees Fahrenheit dew / frost Point  
 ppm(v) - Parts per million (volume)  
 ppb(v) - Parts per billion (volume)  
 ppm(w) - Parts per million (weight)  
 g/m<sup>3</sup> - Grams per cubic metre  
 lbs/MMSCF - Pounds per million standard cubic feet

**DISPLAY:** Blue on Green, 128 x 64 pixel, Graphical LCD with LED backlight.

**SENSOR CALIBRATION ACCURACY:** better than ±2°C dewpoint. Each unit supplied with a Certificate of Calibration, traceable to National & International Standards - National Physical Laboratory (UK) / NIST (USA).

**AUTOMATIC CALIBRATION:** Electronic "Span Check". Performed by user following simple menu driven instructions. Can be password protected to avoid unauthorised tamper.

**REPEATABILITY:** Better than ±0.2°C dew point

**POWER SUPPLY:** Rechargeable Li-Ion Battery. Battery charger included.

**BATTERY LIFE:** In excess of 270 hours of continuous use on full charge at 20°C/68°F.

**TIME TO FULL CHARGE:** 6 hours

**KEYBOARD:** 5 Membrane covered, metallic dome tactile keys.

**PRESSURE CORRECTION:** Integral calculator to display pressure dew points. Gauge pressure can be entered in kPa, kg/cm<sup>2</sup>, bar or psi.

**TEMPERATURE COEFFICIENT:** Temperature compensated for operating range.

**GAS SAMPLE CONNECTIONS:** Ports accept Swagelok® VCO type coupling (9/16" x 18 UNF). Supplied with either 6mm or 1/4" Swagelok® SS compression fitting on one side. The other side is fitted with a stainless steel push-on, "fir tree" type, hose connector

for 6mm ID tube. Each unit is supplied with a 2m length of 6mm ID PTFE tube.

**ELECTRICAL CONNECTIONS:** 9 Pin "D" type for 4-20mA analogue output, RS485 Serial Communications and PC interface. Separate socket for battery charger.

**OPERATING TEMPERATURE:** -10°C to +50°C

**STORAGE TEMPERATURE & HUMIDITY:** -40°C to +80°C / 95% RH Non-condensing

**OPERATING PRESSURE:** Atmospheric pressure, maximum 30kPag (0.3barg / 4 psig).

**OPERATING HUMIDITY (External):** 95% RH Non-condensing

**TYPICAL RESPONSE TIMES:**

Wet to Dry: -10°C to -60°C - less than 120 seconds  
 Dry to Wet: -110°C to -20°C - less than 20 seconds

**SAMPLE FLOW RATE:** Flow independent, but ideally 2 to 5 litres per minute. Max: 10 litres/min.

**REPLACEMENT DESICCANT:** Field Interchangeable.

**SENSOR LIFE:** Between 5 & 10 years - depending on application.

**REPLACEMENT SENSOR:** Field Interchangeable.

**ELECTROMAGNETIC COMPATIBILITY (EMC):** Product complies with the objectives and requirements of EMC Directive BS EN 61326-1.

**SECURITY:** Multi level password protection.

**WARM UP TIME:** 10 seconds

**WEATHERPROOF CLASSIFICATION:** IP54 / NEMA12

**WARRANTY:** 2 years for faulty workmanship and defective parts.

**WEIGHT:** 1.1kgs (2.4lbs)

**DIMENSIONS:** 192 x 97 x 115 mms (7.5 x 3.8 x 4.5 inches)

**MATERIALS OF CONSTRUCTION:** Sensor in metal housing. Outer case custom manufactured in, stainless steel impregnated, high impact Polybutylene Terephthalate (PBT).

**ACCESSORIES INCLUDED:** 2m PTFE Sampling pipe, Universal Battery Charger, User Manual.

### TYPE F

**As TYPE B ABOVE plus following additional specifications & features:**

**ANALOGUE OUTPUT:** Externally powered 4-20mA loop. Linear output with unit selected. Span easily configured by user.

Max. load =  $50 \times (V_{EXT} - 0.6) - 105$   
 $V_{EXT}$  = Supply voltage.  
 (Eg. For 24V supply, Max. load = 1065W)

**ACCESSORIES INCLUDED:** 4-20mA connector for analogue output.

### TYPE L

**As TYPE B ABOVE plus following additional specifications and features:**

**DATA LOGGING:** 16,000 samples. Date and time stamped data, stored in chosen units of measurement for download to PC.

**DATA LOCATION:** 20 separate locations (Tags) can be entered (alpha-numerical) by user for data collection at pre-programmed locations.

**SAMPLING RATES:** User selectable (in intervals of 6 seconds) from once every 6 seconds to once a day.

**DATA DISPLAY:** Numerical and Graphical display of data on SADPmini screen.

**REAL TIME RECORDING:** Device can be programmed to monitor, record and graphically present data in real time directly to PC.

**SERIAL COMMUNICATIONS:** RS485, baud rate 9600 - half duplex.

**ANALOGUE OUTPUT:** Externally powered 4-20mA loop. Linear output with unit selected. Span easily configured by user.

Max. load =  $50 \times (V_{EXT} - 0.6) - 105$   
 $V_{EXT}$  = Supply voltage.  
 (Eg. For 24V supply, Max. load = 1065W)

**ACCESSORIES INCLUDED:** 4-20mA / RS485 Connector for analogue output and serial communications. Serial or USB (Isolated / self powered) interface, with cables, for "Real Time Logging" and data download to PC. Software supplied on CD.

**SYSTEM REQUIREMENT:** Windows® 95 or later for Serial connection & Windows® 2000 or later for USB connection to PC.

### OPTIONAL ACCESSORIES

Hard wearing, padded nylon carrying case, custom manufactured with carry handle, belt loop and adjustable shoulder strap.

## How to Order

Model SADP<sub>mini</sub> - [XX] - [X] - [X] - [XX] - [X] - [XX]

CC: Optional Carrying Case

## RANGE IN DEW POINT = XX:

- \* SR: -110°C to -20°C (-166°F to -4°F) dewpoint
- \* PL: -100°C to 0°C (-148°F to +32°F) dewpoint
- \* RD: -80°C to -20°C (-112°F to -4°F) dewpoint
- \* GY: -80°C to 0°C (-112°F to +32°F) dewpoint
- BL: -80°C to +20°C (-112°F to +68°F) dewpoint

## PC CONNECTION = X

- U: USB (Windows®XP or later)
- (Choose only for Type L.  
Leave blank for Type B or Type F)

## TYPE = X (see specifications)

- B: Standard
- F: With 4-20mA Analogue Output
- L: With logging, RS485 Comms. and 4-20mA Output

MAINS PLUG TYPE-  
For Battery Charger = XX

- UK: Standard UK, 3 Square pin
- US: 2 Vertical Flat Blade
- EU: 2 Round Pins
- AU: 2 Oblique Flat Blades with Ground  
(see diagrams below)


## SAMPLE CONNECTION = X

- 4: 0.25" (1/4") - Swagelok® SS Compression Type
- 6: 6 mm - Swagelok® SS Compression Type
- 8: 0.125" (1/8") - Swagelok® SS Compression Type

## UK Type



## US Type



## EU Type



## Australian Type



## EXAMPLE:

To order device with range -80°C to 0°C dewpoint, with logging capabilities, 6mm pipe connection, for use in UK and to be used with a USB type PC port, order as:

**Model SADP<sub>mini</sub> - GY-L-6-UK-U**

\* For optimum AutoCal operation

## Note: Gases to Avoid

The moisture sensors are suitable for many different industrial and research applications. Most gases can be checked for their moisture content with no need for the calibration to be altered when changing between different gases, as the sensor operates only with reference to the water vapour content. There are, however, some gases that must be avoided, as they are not compatible with the material of construction of the sensor. Ammonia (NH<sub>3</sub>), Ozone(O<sub>3</sub>) and Chlorine (Cl) must be avoided at all times, even in small quantities. Hydrogen Chloride (HCl) also attacks the sensors very quickly. Some, less aggressive, acidic gases, such as Sulphur Dioxide (SO<sub>2</sub>), can be monitored, as long as the moisture content is low, generally less than 100ppm(v). If in doubt, please ask your supplier. Sulphur Hexafluoride (SF<sub>6</sub>) has no effect on the sensor.

## Distributor Information



CERTIFICATE No. FM35600  
BS EN ISO 9001:2008



**Institute of Measurement and Control**  
Companion Company

Alpha Moisture Systems Limited. Registered Office: Alpha House, 96 City Road, Bradford, BD8 8ES

Registered in England and Wales No. 3902302 - VAT Registration No. GB 607 2075 63 - WEEE Producer Registration No. WEEE/EA0067TX

© Alpha Moisture Systems Ltd.

1896 Model SADPmini pd210416-Iss2

Tel +44 (0) 1274 733100

Fax +44 (0) 1274 733200

Email [info@amsystems.co.uk](mailto:info@amsystems.co.uk)

Website [www.amsystems.co.uk](http://www.amsystems.co.uk)